

# Brisa — Ultrafabrics



Acoustical properties • Breathable technology



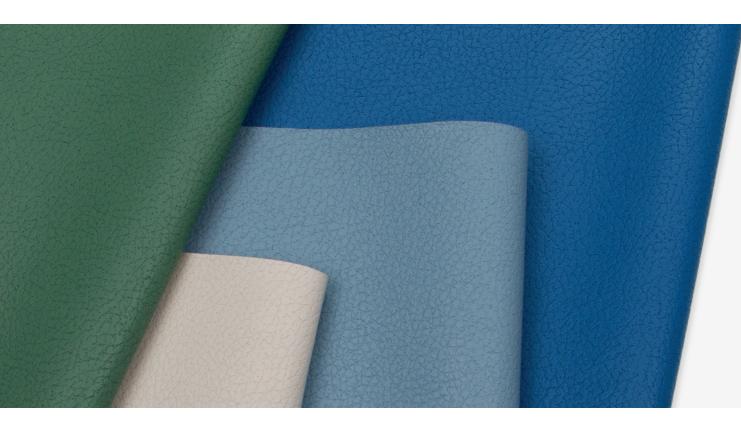

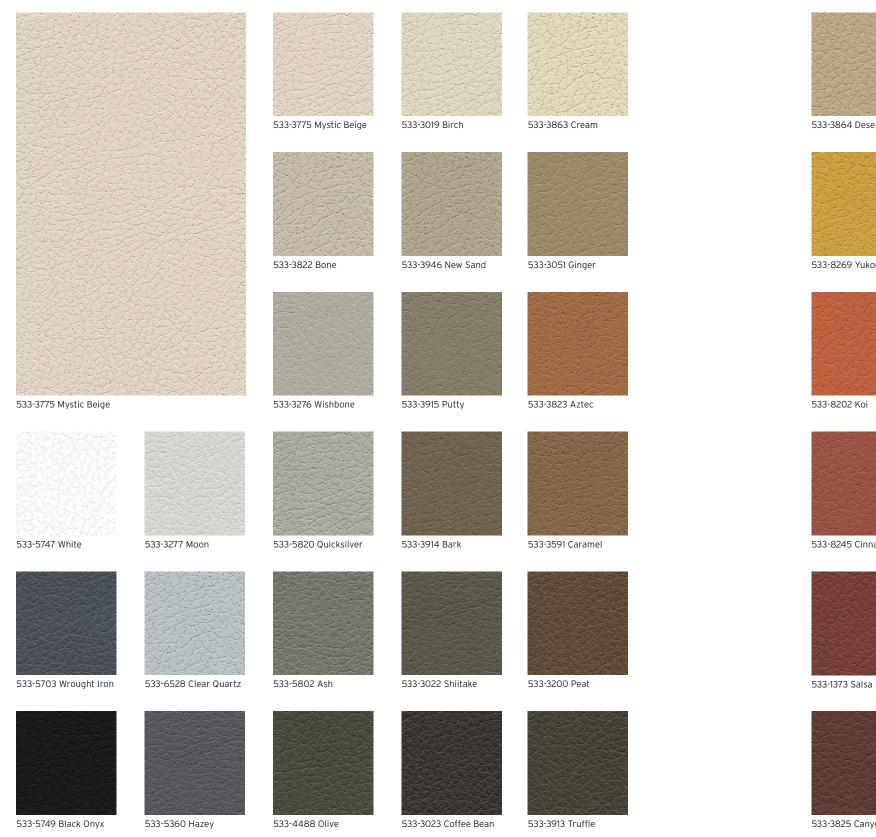





Brisa from Ultrafabrics

## **Applications**

Interior Upholstery

# **General Specifications**

### Composition:

100% Polycarbonate Polyurethane Surface 65% Recycled Polyester, 35% Rayon Backing

#### Weight:

Approx. 8.9 oz. Per Square Yard Approx. 300 Grams Per Square Metre

#### Thickness:

Approx. 0.95 Millimetres

### Width:

54 Inches / 137 Centimetres

#### Repeat:

None

#### **Performance**

ASTM D4157 / 300,000 Double Rubs (Wyzenbeek)\* BS EN ISO 12947-2 / 160,000 Rubs (Martindale)\* \*meets or exceeds

#### Hydrolysis:

Tensile Strength:

16 Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability) ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: **ASTM D2261** 

Breaking Strength: ASTM D751

Air Permeability: ASTM D737

**BS EN ISO 1421** 

Sound Absorption: ASTM C423

### Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4

ISO 105 B02, Grade 6

AATCC 8, Grade 4-5 Wet & Dry Crocking:

# Flammability Requirements

- · ASTM E84 (Adhered) Class A
- CA TB 117-2013 Pass
- FMVSS 302 Pass
- NFPA 260 Class 1
- UFAC Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

ASTM E84 (Unadhered)

• BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)

IMO FTPC Part 8

• BS EN 1021 Parts 1 & 2

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

\* Only in North America



