


Fresco — Ultrafabrics



544-3102 Grotto

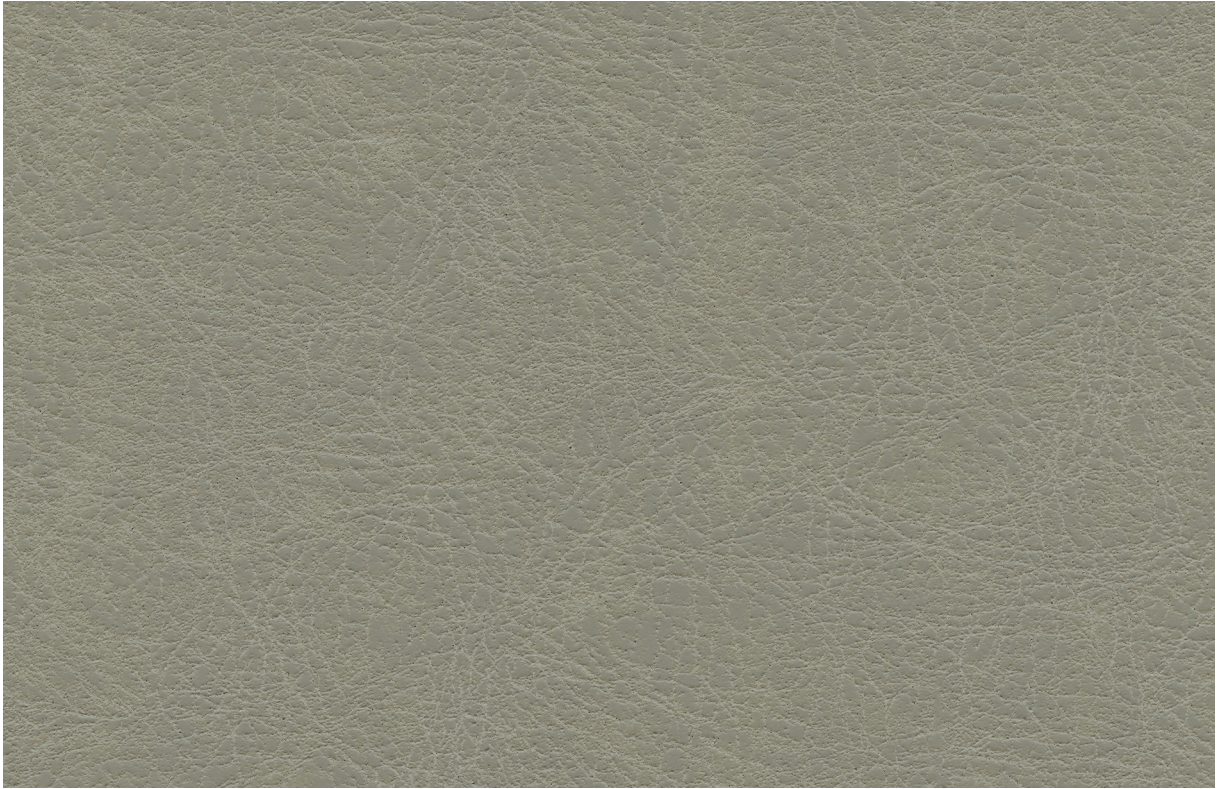

544-3100 Whey



544-3102 Grotto




544-5743 Peninsula



544-3101 Oatstraw




544-3197 Patina




544-5752 Flint



544-3105 Sepia




544-5754 Peppercorn



544-2566 Azurite



Acoustics*



Breathable Comfort

Fresco from Ultrafabrics

Application

Interior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
65% Recycled Polyester, 35% Rayon Backing

Weight:

Approx. 8.9 oz. Per Square Yard
Approx. 300 Grams Per Square Metre

Thickness:

Approx. 0.95 Millimetres

Width:

54 Inches / 137 Centimetres

Repeat:

5.51" V x 3.54"H / 140mm V x 90mm H

Performance

Abrasion:

ASTM D4157 / 300,000 Double Rubs (Wyzenbeek)*
BS EN ISO 12947-2 / 160,000 Rubs (Martindale)*
*meets or exceeds

Hydrolysis:

16 Weeks
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D751

Tensile Strength: BS EN ISO 1421

Air Permeability: ASTM D737

Sound Absorption: ASTM C423

Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

Crocking: AATCC 8, Class 4-5 Wet & Dry

Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117-2013 - Pass
- FMVSS 302 - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- IMO FTPC Part 8
- BS EN 1021 Parts 1 & 2
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

* Only in North America



ultrafabricsinc.com

Ultrafabrics® and logo are registered trademarks of Ultrafabrics Inc. Made in Japan.

